

The classic silhouette of this sleek LED wall sconce makes it suitable for both indoor and outdoor applications. The Bowman's die-cast aluminum body houses a powerful, long-lasting LED light source tightly controlled for down light only, yet supplying significant illumination for even the darkest nights.

### High quality LM80-tested LEDs

for consistent long-life performance and color

### Outstanding protection against the elements:

- Powder coat finishes
- Stainless Steel mounting hardware
- Impact-resistant, UV stabilized frosted acrylic lensing

## SPECIFICATIONS

DELIVERED LUMENS	1163
WATTS	47.2
VOLTAGE	120V, 277V
DIMMING	ELV
LIGHT DISTRIBUTION	Symmetric
MOUNTING OPTIONS	Downlight
CCT	2700K**, 3000K
CRI	80+
COLOR BINNING	3 Step
BUG RATING	B1-U0-G0
DARK SKY	Compliant
WET LISTED	IP65
GENERAL LISTING	ETL
CALIFORNIA TITLE 24	Can be used to comply with CEC 2016 Title 24 Part 6 for outdoor use. Registration with CEC Appliance Database not required.
START TEMP	-30°C
FIELD SERVICEABLE LED	No
CONSTRUCTION	Aluminum
HARDWARE	Stainless Steel
FINISH	Powder Coat
LED LIFETIME	L70; 70,000 Hours
WARRANTY*	5 Years
WEIGHT	3.2 lbs.

\* Visit [techlighting.com](http://techlighting.com) for specific warranty limitations and details.

\*\* Available in Black and Bronze finish only.



BOWMAN 6  
shown in black



BOWMAN 6  
shown in bronze



BOWMAN 6  
shown in charcoal



BOWMAN 6  
shown in silver




BOWMAN 6  
shown in white

## ORDERING INFORMATION

700WSBOW	LENGTH	FINISH	LAMP
	6 6"	<b>B</b> BLACK	<b>-LED827</b> LED 80 CRI, 2700K 120V*
		<b>Z</b> BRONZE	<b>-LED827277</b> LED 80 CRI, 2700K 277V*
		<b>H</b> CHARCOAL	<b>-LED830</b> LED 80 CRI, 3000K 120V
		<b>I</b> SILVER	<b>-LED830277</b> LED 80 CRI, 3000K 277V
		<b>W</b> WHITE	

\*AVAILABLE IN BLACK AND BRONZE FINISH ONLY

# BOWMAN 6 WALL SCONCE

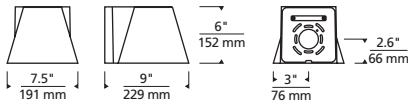


Bowman 6

## PHOTOMETRICS\*

\*For latest photometrics, please visit [www.techlighting.com/OUTDOOR](http://www.techlighting.com/OUTDOOR)

### BOWMAN 6

Total Lumen Output: 1163  
 Total Power: 47.2  
 Luminaire Efficacy: 24.6  
 Color Temp: 3000K  
 CRI: 80+  
 BUG Rating: B1-U0-G0

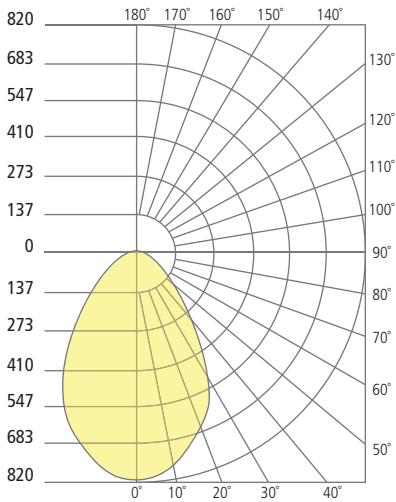

## PROJECT INFO

FIXTURE TYPE & QUANTITY

JOB NAME & INFO

NOTES

---



---



---



---



---



---

