

The elegantly simple design of the Port outdoor wall sconce is completely backlit to create a soft glow of illumination enhancing the geometry of the fixture. The Port is available Round or Square and comes in two sizes (8", 13") to meet the architectural scale of its surroundings. Port wall sconces feature energy-efficient, fully dimmable integrated LED lighting. Available in three finishes: Black, Bronze and Charcoal.

High quality LM80-tested LEDs

for consistent long-life performance and color


Outstanding protection against the elements:

- Powder coat finishes
- Stainless Steel mounting hardware
- Impact-resistant, UV stabilized frosted acrylic lensing
- IP-65 Rated

SPECIFICATIONS

| | |
|-----------------------|---|
| DELIVERED LUMENS | 662.1 |
| WATTS | 32 |
| VOLTAGE | Universal 120-277V, with integral transient 2.5kV surge protection (driver) |
| DIMMING | 0-10, ELV, TRIAC |
| LIGHT DISTRIBUTION | Symmetric |
| MOUNTING OPTIONS | Wall |
| PERFORMANCE OPTIONS | In-Line Fuse / Surge Protector |
| CCT | 3000K |
| CRI | 90+ |
| COLOR BINNING | 3 Step |
| BUG RATING | B0-U3-G1 |
| DARK SKY | Non-compliant |
| WET LISTED | IP65 |
| GENERAL LISTING | ETL |
| CALIFORNIA TITLE 24 | Can be used to comply with CEC 2016 Title 24 Part 6 for outdoor use. Registration with CEC Appliance Database not required. |
| START TEMP | -30°C |
| FIELD SERVICEABLE LED | No |
| CONSTRUCTION | Aluminum |
| HARDWARE | Stainless Steel |
| FINISH | Powder Coat |
| LED LIFETIME | L70; 70,000 Hours |
| WARRANTY* | 5 Years |
| WEIGHT | 6.5 lbs. |

* Visit techlighting.com for specific warranty limitations and details.

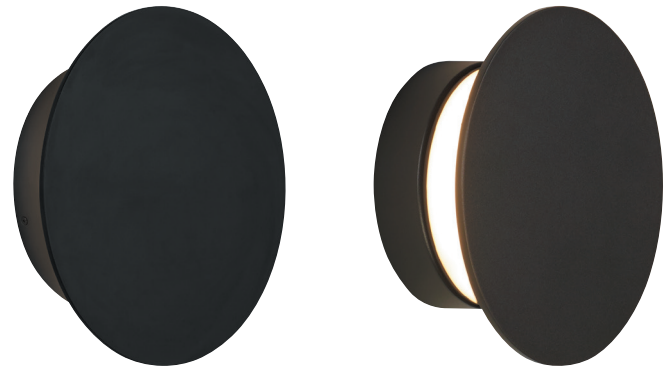

PORT 13 ROUND
shown in black



PORT 13 ROUND
shown in bronze




PORT 13 ROUND
shown in charcoal

ORDERING INFORMATION

| 7000WPRT | SHAPE | CRI / CCT | LENGTH | LENS | FINISH | VOLTAGE | DISTRIBUTION | OPTIONS |
|----------|---------|-------------------|--------|-----------|-----------------------------------|-------------------------|--------------|--|
| | R ROUND | 930 90 CRI, 3000K | 13 13" | F FROSTED | B BLACK Z BRONZE H CHARCOAL | UNV 120V-277V UNIVERSAL | S SYMMETRIC | NONE LF IN-LINE FUSE SP SURGE PROTECTION LFSP IN-LINE FUSE & SURGE PROTECTION |

PORT 13 ROUND WALL

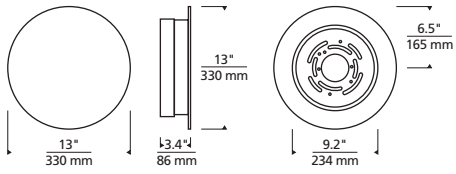


Port 13 Round

PHOTOMETRICS*

*For latest photometrics, please visit www.techlighting.com/OUTDOOR

PORT 13 ROUND

Total Lumen Output: 662.1
 Total Power: 32
 Luminaire Efficacy: 21
 Color Temp: 3000K
 CRI: 90
 BUG Rating: B0-U3-G1

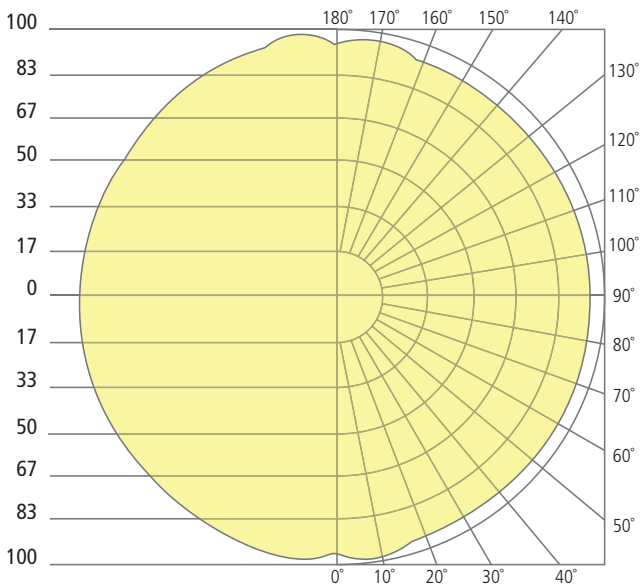

PROJECT INFO

FIXTURE TYPE & QUANTITY

JOB NAME & INFO

NOTES



© 2020 Tech Lighting, L.L.C. All rights reserved. The "Tech Lighting" graphic is a registered trademark. Tech Lighting reserves the right to change specifications for product improvements without notification.